


过渡接头 ADAPTER

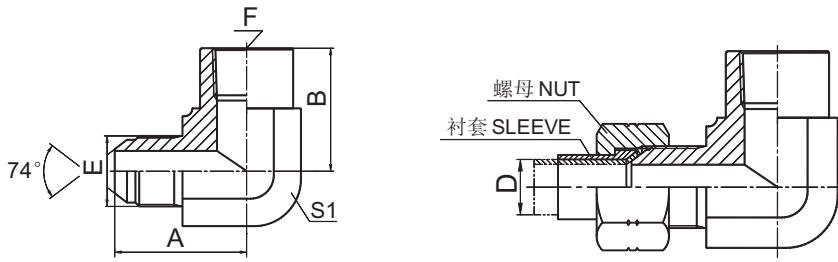

5JN9

90° 弯 JIC 外螺纹 74° 外锥 / 布锥管内螺纹
90° ELBOW JIC MALE 74° CONE / NPT FEMALE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS					
	E	F	A	B	S1			
5JN9-04-02	7/16"X20	Z1/8"X27	27.5	16.8	16			
5JN9-04	7/16"X20	Z1/4"X18	30.9	22.4	19			
5JN9-06-04	9/16"X18	Z1/4"X18	31.2	22.4	19			
5JN9-06	9/16"X18	Z3/8"X18	33.5	25.9	24			
5JN9-08-04	3/4"X16	Z1/4"X18	31.6	22.4	19			
5JN9-08	3/4"X16	Z1/2"X14	39.5	31.2	30			
5JN9-12-08	1.1/16"X12	Z1/2"X14	46	31.2	30			
5JN9-12	1.1/16"X12	Z3/4"X14	48	34.5	33			
5JN9-12-16	1.1/16"X12	Z1"X11.5	52.5	41.1	41			
5JN9-16-12	1.5/16"X12	Z3/4"X14	49	34.5	33			
5JN9-16	1.5/16"X12	Z1"X11.5	55.1	41.1	41			
5JN9-20	1.5/8"X12	Z1.1/4"X11.5	59.2	43.2	48			
5JN9-24	1.7/8"X12	Z1.1/2"X11.5	73.4	52.8	63			

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.